

READY TO APPLY VINYL


Step by step on installing your printed or single color vinyl decals



You have received a completed decal. If necessary, roll the decals loosely, facing outward. Once you arrive at the install destination, allow the decal to “relax”. You can prepare the install surface with a 2:1 mixture of water to rubbing alcohol. Wipe surface until dry with a lint free cloth.




LEGEND

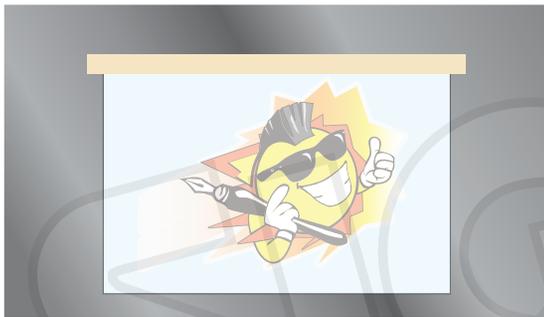

Measure and confirm the placement of your decal. Use masking tape along the top edge to keep your placement. This will act as a hinge.

Take a moment to look over the decal and double check your measurements. If all looks good move to the next step.

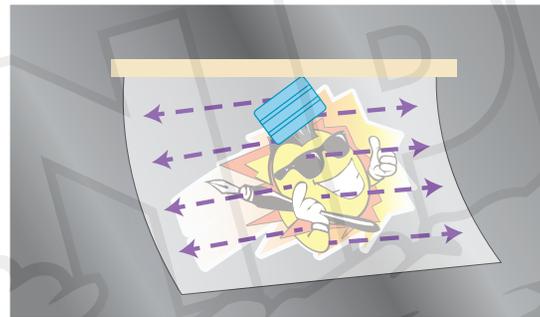

Remove the backing paper entirely. With the provided squeegee, apply firm pressure working back and forth, from top to bottom

Tip - Keep the adhesive from touching the surface until you press the decal down with the squeegee. This avoids small air bubbles in the decal.



Remove the masking paper by pulling down against itself, leaving just the applied vinyl.



Final Look!

(Looking good Sunny)

Basic Decal Care

Install should be done at temperatures above 40° F.

On single color cast vinyl, you can apply wet with 99:1 parts water to soap mix . Spray surface after you have the backing paper remove and before starting to squeegee.

Do not use wet application on printed vinyls.

Do not power wash surface for atleast 2 weeks.

Penetrating solvents and calcium chloride solutions will cause damage to the graphics and could compromise the vinyl's adhesive.

Use a mild soap to clean decals