


READY TO APPLY VINYL

Step by Step install for two or more colors of cast vinyl

Step One: Clean the surface with a 2:1 water to rubbing alcohol mix

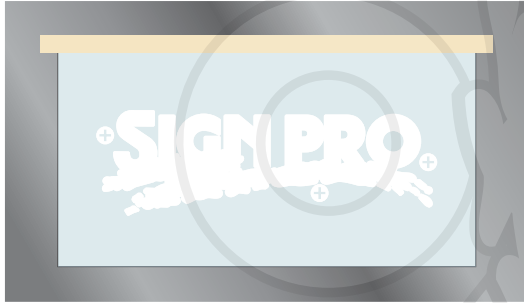


Step Two: Measure and confirm the placement of your decal. Use masking tape along to top edge to keep your placement. This will act as a hinge.



Step Four: Remove the mask by Pulling down against itself, leaving just the applied vinyl.



Step Six: Repeat for the additional colors of vinyl.

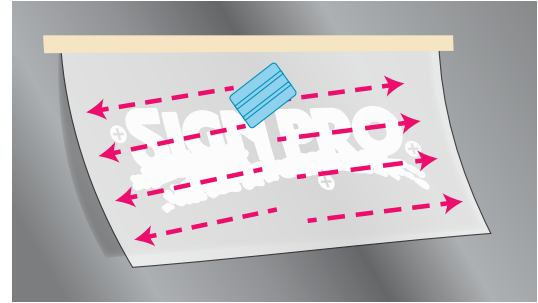

Step Three: Remove the Backing paper entirely. With the provided squeegee, apply firm pressure working back and form from top to bottom.



Step Five: Using the registration marks, overlay the second color, remove the backing paper and double check marks before repeating step three & four.



Lastly, Remove all the registration marks, and clean any remaining adhesive. Your graphics are now complete!

Basic Decal Care

Do not use wet application on printed vinyls.
Do not power wash surface for atleast 2 weeks.
Install should be done at temperatures above 50° F.

Penetrating solvents and calcium chloride solutions will cause damage to the graphics and could compromise the vinyl's adhesive.

Use a mild soap to clean decals